


## Description

The T880 is a Single-Mode (SM) Fiber based High Temperature Fiber Bragg Grating (HTFBG) Sensing Array, packaged into a precision manufactured Ceramic tube and rated for operation to +1000C. The daisy-chined HTFBG embedded sensors are ultra-small and are designed for use multi-sensing-point applications with the added requirement of minimal intrusion. Immune to EMI and lightning.

The T880 optical temperature sensing probe consists of up to 40 Fiber Bragg Grating sensing elements embedded in singlemode fibers. Available with Gold, Copper, Aluminum, Polyimide, or Acrylate fiber coatings, or as coating free fiber sensors, depending on the desired temperature rating and application details. Ceramic tube hermetic sealing (capping) and calibration service is available upon request. Sensing probe length and diameter limitations apply.

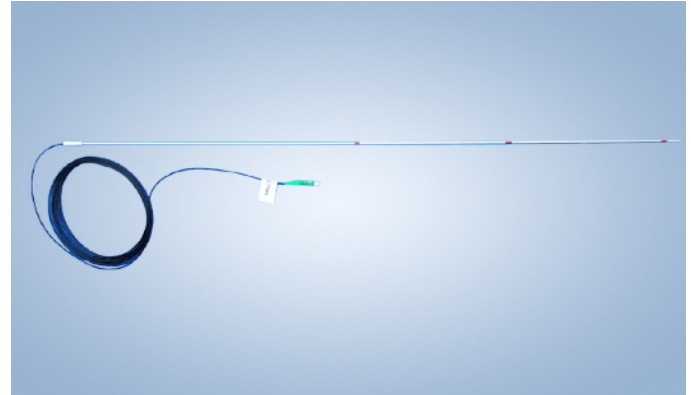

Manufactured by Technica under International License from Raytheon Technologies


## Key Features

**Temperature linearity.** The precision made HTFBG array structure written into the fibers' core for producing the T880 yields a simple transducer configuration of high resolution, linearity, and measurement repeatability.

**Customizable Multi-Point Sensing.** Well suited for projects that include the need to monitor many points, as the T880 is a ready to deploy sensing probe available in customer defined distances between FBGs, and featuring a flexible number of FBGs to match the requests of our customers, with a maximum sensing probe length of 1m, not including the pigtail. Standard connectors termination or spliced to specialty cables available.

**Reliable high-temperature measurements.** Designed for projects that require both the availability of high- temperature resistant FBG sensors and stable operation for highly accurate measurements over the long-term. The T880 installation is easy and fastening methods are by simple mounting brackets, and by ceramic tube bonding, laying, inserting, or embedding.

**Proven field performance.** The company's family of High-Temperature Multipoint FBG Sensing Probes are a commercial product manufactured in increasing volumes. Installed in applications worldwide with practically no returns since initial release. The world leading sensing probe lengths, outer diameters options, and proprietary ceramic transition and hermetic sealing technology make the T880 a valuable sensing product that extends the range of applications addressable by FBG sensors.

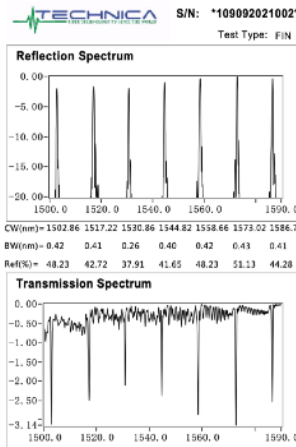

Parameter	Specifications
Wavelengths / Tolerance	1460 to 1620 nm, +/-1 nm; 980, 1060, 1310 nm, other
Reflection BW (FWHM)	0.15 nm to 50.0 nm < +400°C; 0.15 nm to 0.8 nm > +400°C;
Reflectivity %	>20%; other options
FBG Length	1mm -10mm
SLSR	10 dB; other options
Response Time	1 second
Maximum Temperature Options	To +100°C, +300°C, +400°C, +500°C, +600°C, +800°C, +900°C, and +1000°C
Fiber Coating Options (inside the Ceramic probe)	Acrylate, Polyimide, Aluminum, Copper, Gold, and Bare Uncoated Fiber
Fiber Type (core/clad/coat)	Single-Mode 9/125/155um
Sensor Configurations	Sealed-tip multipoint sensing probe w optical cable pigtail
Sensing Probe Diameter (OD), Length	1mm Standard, other options from 0.5mm to 3mm OD; 0.5m standard, other options
Pigtail Length, Bend Radius, Protection, Connector	1m, > 17 mm, Fiber Braid, FC/APC, other options

## Applications in Materials and Equipment Test Labs, Aviation, Energy, Industrial, and Research

Technica undertakes a rigorous development process before products release. The company is also firmly committed to continuous improvements after release to insure performance to the highest standards, hence, specifications are subject to update without notice.